

Building owners and managers: 10 things to check on your fire doors

ASSA ABLOY
Opening Solutions

The global leader in
door opening solutions

3. & 4. Door Closer:

Ensure it closes correctly around all parts of the frame

Check that the closer shuts the door onto the latch from any position – we suggest about 75mm from the closed position

5. Door gap:

Check the gap around the door frame is constant and around 3 to 4 mm

8. Vision panel:

Make sure you have Fire Rated glass and seals and Beads holding glass are firmly fixed

10. Signage:

Check that the door is marked correctly with appropriate signage

1. Fire Door ID label:

Look for a label, a plug or similar marking to show that it's certificated

2. Door Leaf:

Make sure the door leaf isn't damaged, warped or twisted

6. Hinge:


Check the hinges are firmly fixed into the door and frame with no missing screws

7. Seal:

Ensure that the seals at the top and sides of the door are not damaged or missing

9. Door:

Make sure the door is not wedged or propped open

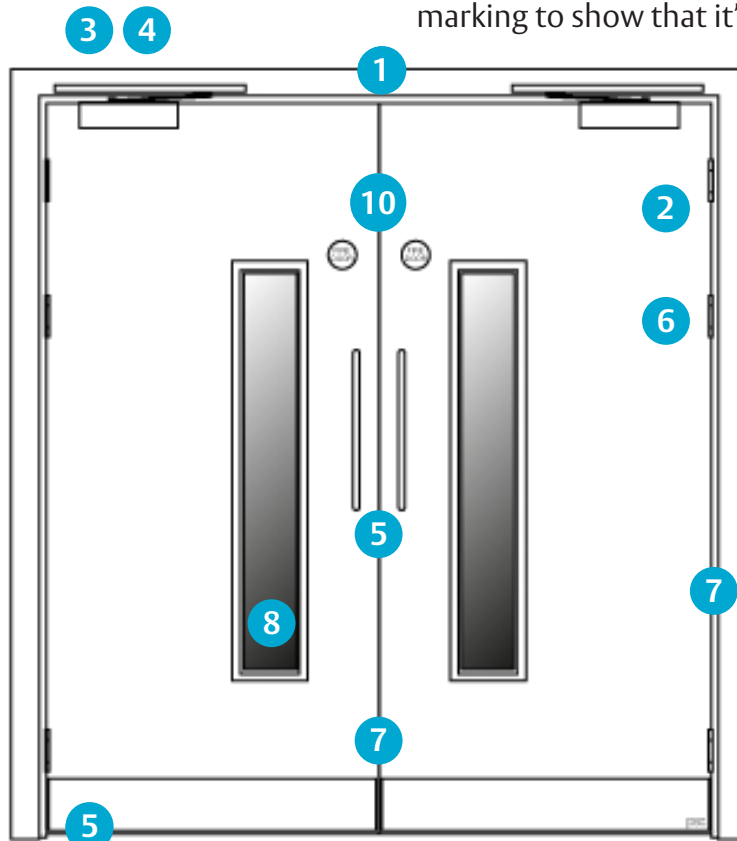

**We provide a fully comprehensive inspection,
which can be done on an annual or every six months.**

Find out more
[assaabloyopeningsolutions.co.uk/
fdinspection](https://assaabloyopeningsolutions.co.uk/fdinspection)

ASSA ABLOY Opening Solutions UK & Ireland

Door Group

Denton Office

Millennium House

Progress Way

Denton

M34 2GP

Tel: +44 (0)208 844 1800

AASDSales@assaabloy.com

[www.assaabloyopeningsolutions.co.uk/
doorgroup](https://www.assaabloyopeningsolutions.co.uk/doorgroup)